

FS-480 Series – Stainless Steel Flow Switch

PISTON TYPE

Flow Rate Settings: 1.9 l/min to 11.4 l/min

Port Size: 1/2" NPT, 3/4" NPT, 1/2" Tube Compression Fitting

Primary Construction Material: 316 Stainless Steel


Setting Type: Fixed

The FS-480 large-body inline flow switch delivers ample flow rates with minimal pressure drop. 25% larger than its FS-380 sibling, the FS-480 is ideal for processes that push more fluid through their systems and demand low pressure drops. Designed to accommodate the Semiconductor Industry's move to larger 300mm wafer and cross-over equipment, this switch is also perfect for critical medical applications. A glass-reinforced PPS piston and forged 316 stainless steel body make this sensor rugged enough for high pressure lubrication and cooling systems as well. This simple, yet meticulously perfected design provides the reliability required in critical applications while allowing for much lower pressure drop rates than other available switches.

Specifications

Wetted materials housing	316 Stainless Steel
Piston	PPS, Epoxy
Spring	316 Stainless Steel
O-Ring	Fluorocarbon
Max operating pressure	69 Bar
Minimum line pressure	350mb
Operating temperature	-29°C to +121°C (-20°F to +250°F)
Set point accuracy	±20% Maximum
Set point differential	20% Maximum
Recommended filtration	100 Micron or better
Switch	SPST, 20VA, 120/240 Vac, N.O. at no flow
Electrical termination 0.6(approx)	PVC Cable, 22AWG
Filtration	100 microns

Pressure Drop - Typical 3.8 l/min Set Point

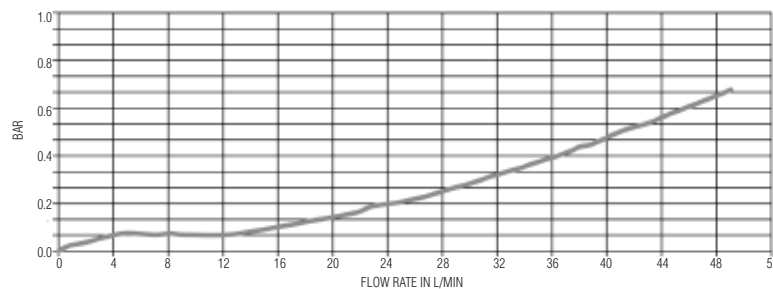

How to Order – Standard Models

Specify Part Number based on flow settings.


Flow Settings* L/Min	1/2" NPT Port	3/4" NPT Port	1/2" Tube Compression Fitting
1.9	206915	204715	204710
3.8	206916	204716	204711
5.7	206917	204717	204712
7.6	206918	204718	204713
11.4	206919	204719	204714

*Calibrated with unit in vertical position, inlet port down.




Dimensions (in mm)

1/2" NPT Ports

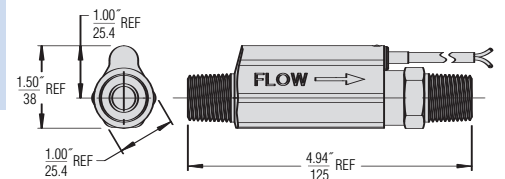

3/4" NPT Ports

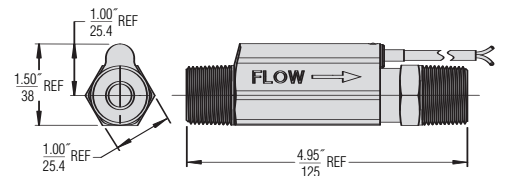

1/2" Tube End Compression Fitting

