



Pressure Reducing Valves for Steam

Small capacity, available in various capacities DM 505Z

All CrNiMo steel construction.
 PN250
 p₂0,005 - 20 bar
 K_{vs}0,15, 0,4 oder 0,9 m³/h

DN15 - 25
 G $\frac{1}{2}$
 T200°C



DM 152 Hygienic applications, small capacity



Virtually pocket-free, can be electropolished
 all CrNiMo steel construction.
 PN16
 p₂0,3 - 5 bar
 K_{vs}2 - 5,2 m³/h

DN15 - 50
 T180°C

Hygienic applications, large capacity DM 462

Virtually pocket-free, can be electropolished
 all CrNiMo steel construction.
 PN16 - 40
 p₂0,8 - 12 bar
 K_{vs}3,7 - 16 m³/h

DN25 - 50
 T200°C

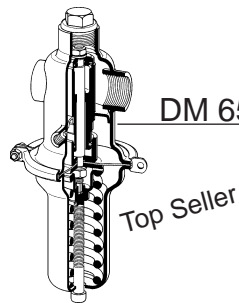

DM 652 Universale valve, normale to sterile steam



All CrNiMo steel construction.
 PN16 - 40
 p₂0,02 - 12 bar
 K_{vs}4 - 18 m³/h

DN15 - 50
 G $\frac{1}{2}$ - 2
 T190 °C

Standard valve, cast body DM 603 604

DM 604 up to 250 °C, DM 603 up to 350 °C.
 Body GG-25, GGG-40, GS-C 25.
 PN16 - 40
 p₂0,02 - 10 bar
 K_{vs}4 - 160 m³/h

DN15 - 150
 T250/350°C

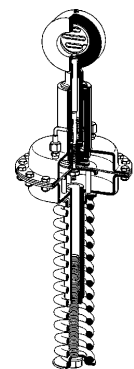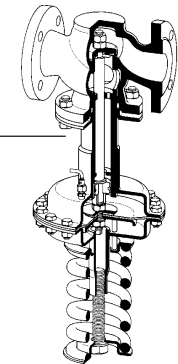

DM 307 308 High capacity, only for small pressure drops



Sliding gate, sandwich design
 DM 307 features an open spring, DM 308 has a closed spring cap.
 Body carbon steel, CrNiMo steel.
 PN10 - 40
 p₂0,1 - 10 bar
 K_{vs}2 - 338 m³/h

DN15 - 150
 T300°C

High pressure, small capacity DM 701

For high temperatures and high pressures.
 Body GG-20, GGG-40, GS-C 25, 13 CrMo 55.
 PN16 - 315
 p₂0,5 - 40 bar
 K_{vs}0,2 - 5,5 m³/h

DN15 - 50
 T530°C

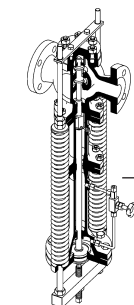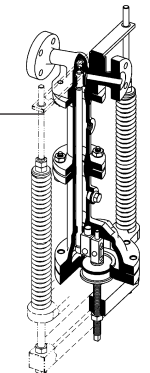

DM 401 High pressure, large capacity

Double seat valve. As soot blower with damping.
 Body GG-20, GGG-40, GS-C 25, GS 17 CrMo 55.
 PN16 - 250
 p₂1,5 - 40 bar
 K_{vs}6 - 360 m³/h

DN25 - 250
 T530°C

DM 14.1.031.1 13.01.2003